



人造板设备用链条 Conveyor chains for fibreboard equipment

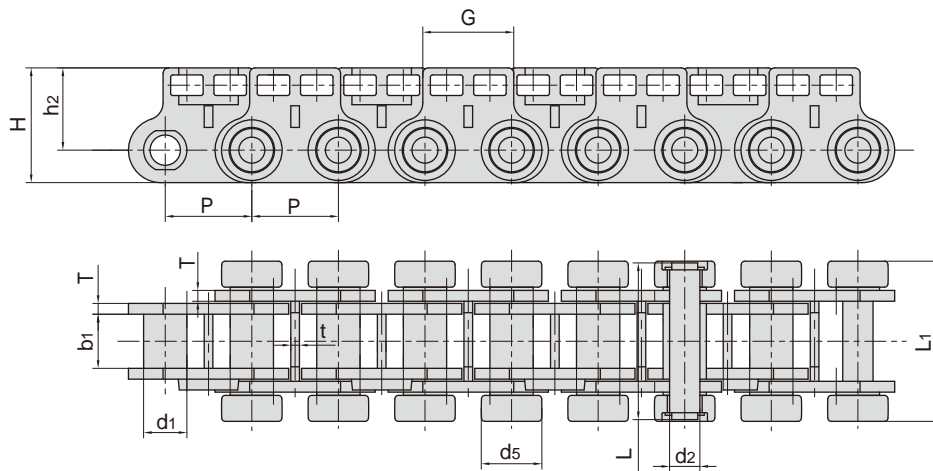

| 东华链号 Donghua Chain No. | 节距 Pitch | 套筒直径 Bush diameter | 内节内宽 Width between inner plates | 销轴直径 Pin diameter | 销轴长度 Pin length | 链板高度 Plate depth | 链板厚度 Plate thickness | 抗拉强度 Tensile strength | 每米长重 Weight per meter |
|------------------------------|-------------|--------------------------|------------------------------------------|-------------------------|-----------------------|------------------------|----------------------------|-----------------------------|--------------------------------|
| | P | d1 max | b1 min | d2 max | L max | H max | T max | Q min | q |
| | mm | mm | mm | mm | mm | mm | mm | kN/lbf | kg/m |
| P40 | 40.0 | 20.0 | 25.0 | 14.0 | 73.0 | 53.0 | 5.0 | 90.0/20250 | 10.67 |

| 东华链号 Donghua Chain No. | P | G | L1 | h2 | d5 | t |
|------------------------------|------|------|------|------|------|-----|
| | mm | mm | mm | mm | mm | mm |
| P40 | 40.0 | 42.0 | 75.0 | 38.0 | 28.0 | 4.0 |

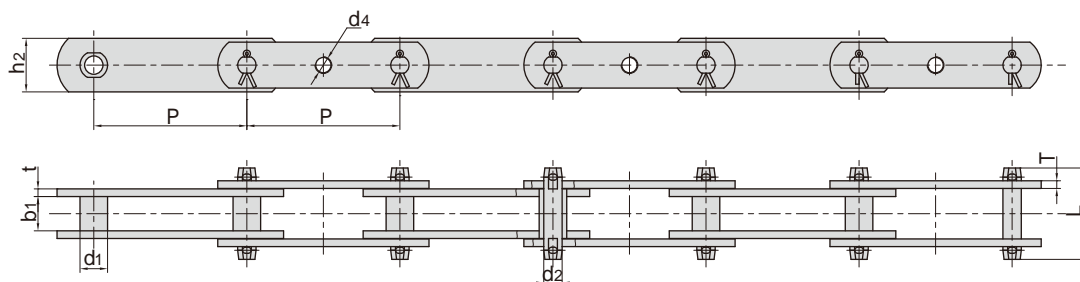

| 东华链号 Donghua Chain No. | 节距 Pitch | 套筒直径 Bush diameter | 内节内宽 Width between inner plates | 销轴直径 Pin diameter | 销轴长度 Pin length | 链板尺寸 Plate size | | | 抗拉强度 Tensile strength | 每米长重 Weight per meter |
|------------------------------|-------------|--------------------------|------------------------------------------|-------------------------|-----------------------|-----------------------|-----|-----|-----------------------------|--------------------------------|
| | P | d1 max | b1 min | d2 max | L max | h2 max | d4 | t/T | Q min | q |
| | mm | mm | mm | mm | mm | mm | mm | mm | kN/lbf | kg/m |
| P100F270GK | 100.0 | 18.0 | 22.0 | 12.0 | 60.0 | 35.0 | M10 | 5.0 | 98.0/22030 | 4.60 |
| P100F178 | 100.0 | 18.0 | 22.0 | 12.0 | 54.0 | 30.0 | M10 | 5.0 | 98.0/22030 | 4.00 |